
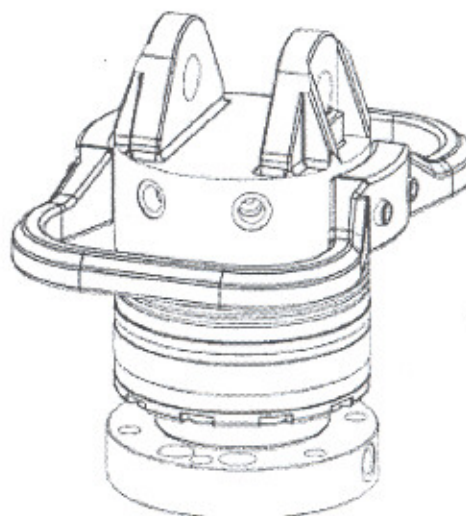
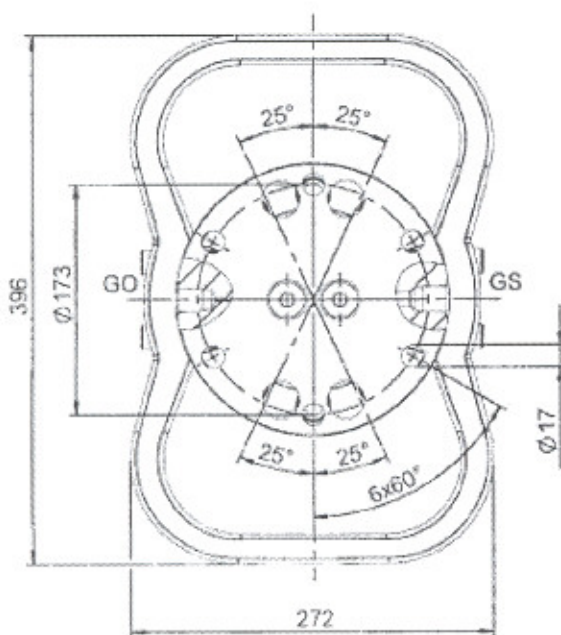
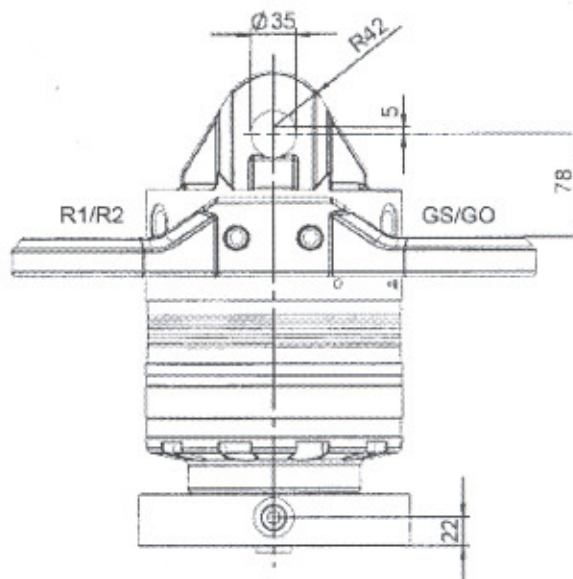


# RSV Rotator

# R 7 H-1

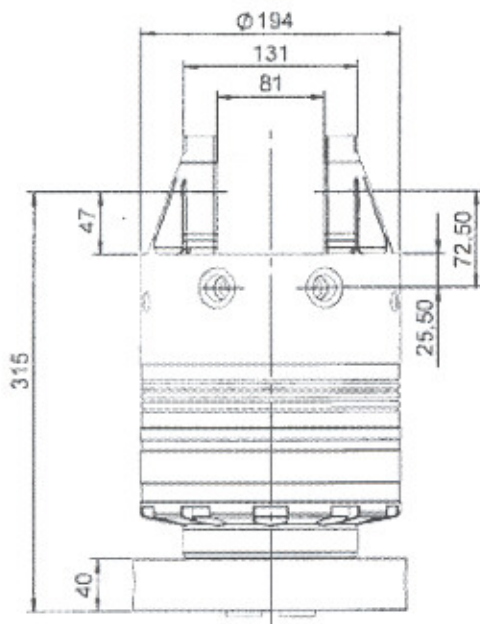

HL555813

## Technische Daten / technical data

Traglast axial statisch	load axial static:	(kg)	26455	12000
Drehmoment	torque	(Nm)	1917	2600
Drehzahl	rotational speed:	(U/min.)		22
Betriebsdruck	operating pressure			
Drehen max	rotating max:	(bar)		320
Greifer max	rotary feedthrough max:	(bar)		320
Gewicht	weight:	(kg)		48
erforderlicher Ölfluss beim Drehen / recommended flow				
minimum:		(l/min)		10
optimal:		(l/min)		22

## Anschlüsse / connections

R1 (1/2")	Drehen links / rotating left
R2 (1/2")	Drehen rechts / rotating right
GO (1/2")	Greifer öffnen / clamshell open
GS (1/2")	Greifer schließen / clamshell close

Einsatzgebiet Baggerdiensgewicht / operating fields (t)  
 Kardanisch / cardanic suspension:  
 Materialumschlag / materialhandling:  
 Festanschluss / fix connection:

Technische Änderungen vorbehalten / technical changes reserved

Blatt / sheet:  
1 von 1

Ausgabe / version:  
A

Datum / date:  
15.04.2007

## Datenblatt / data sheet