



Powerful Synergies



# COPMA

168

**HIGH POWER  
MODEL**


# COPMA 168

Performance & Power

**168 HAS THE HIGHEST LIFTING RANGE AND TOP POWER-WEIGHT RATIO COMBINING ADVANCED TECHNOLOGY FEATURES FOR MORE PERFORMANCE.**

- **HIGH POWER model, load category - 16 Ton/Mt**
- **Designed for every kind of job**
- **Strong linkage system on each arm to get maximum performance**
- **Precise and fast work execution**
- **High safety standards**



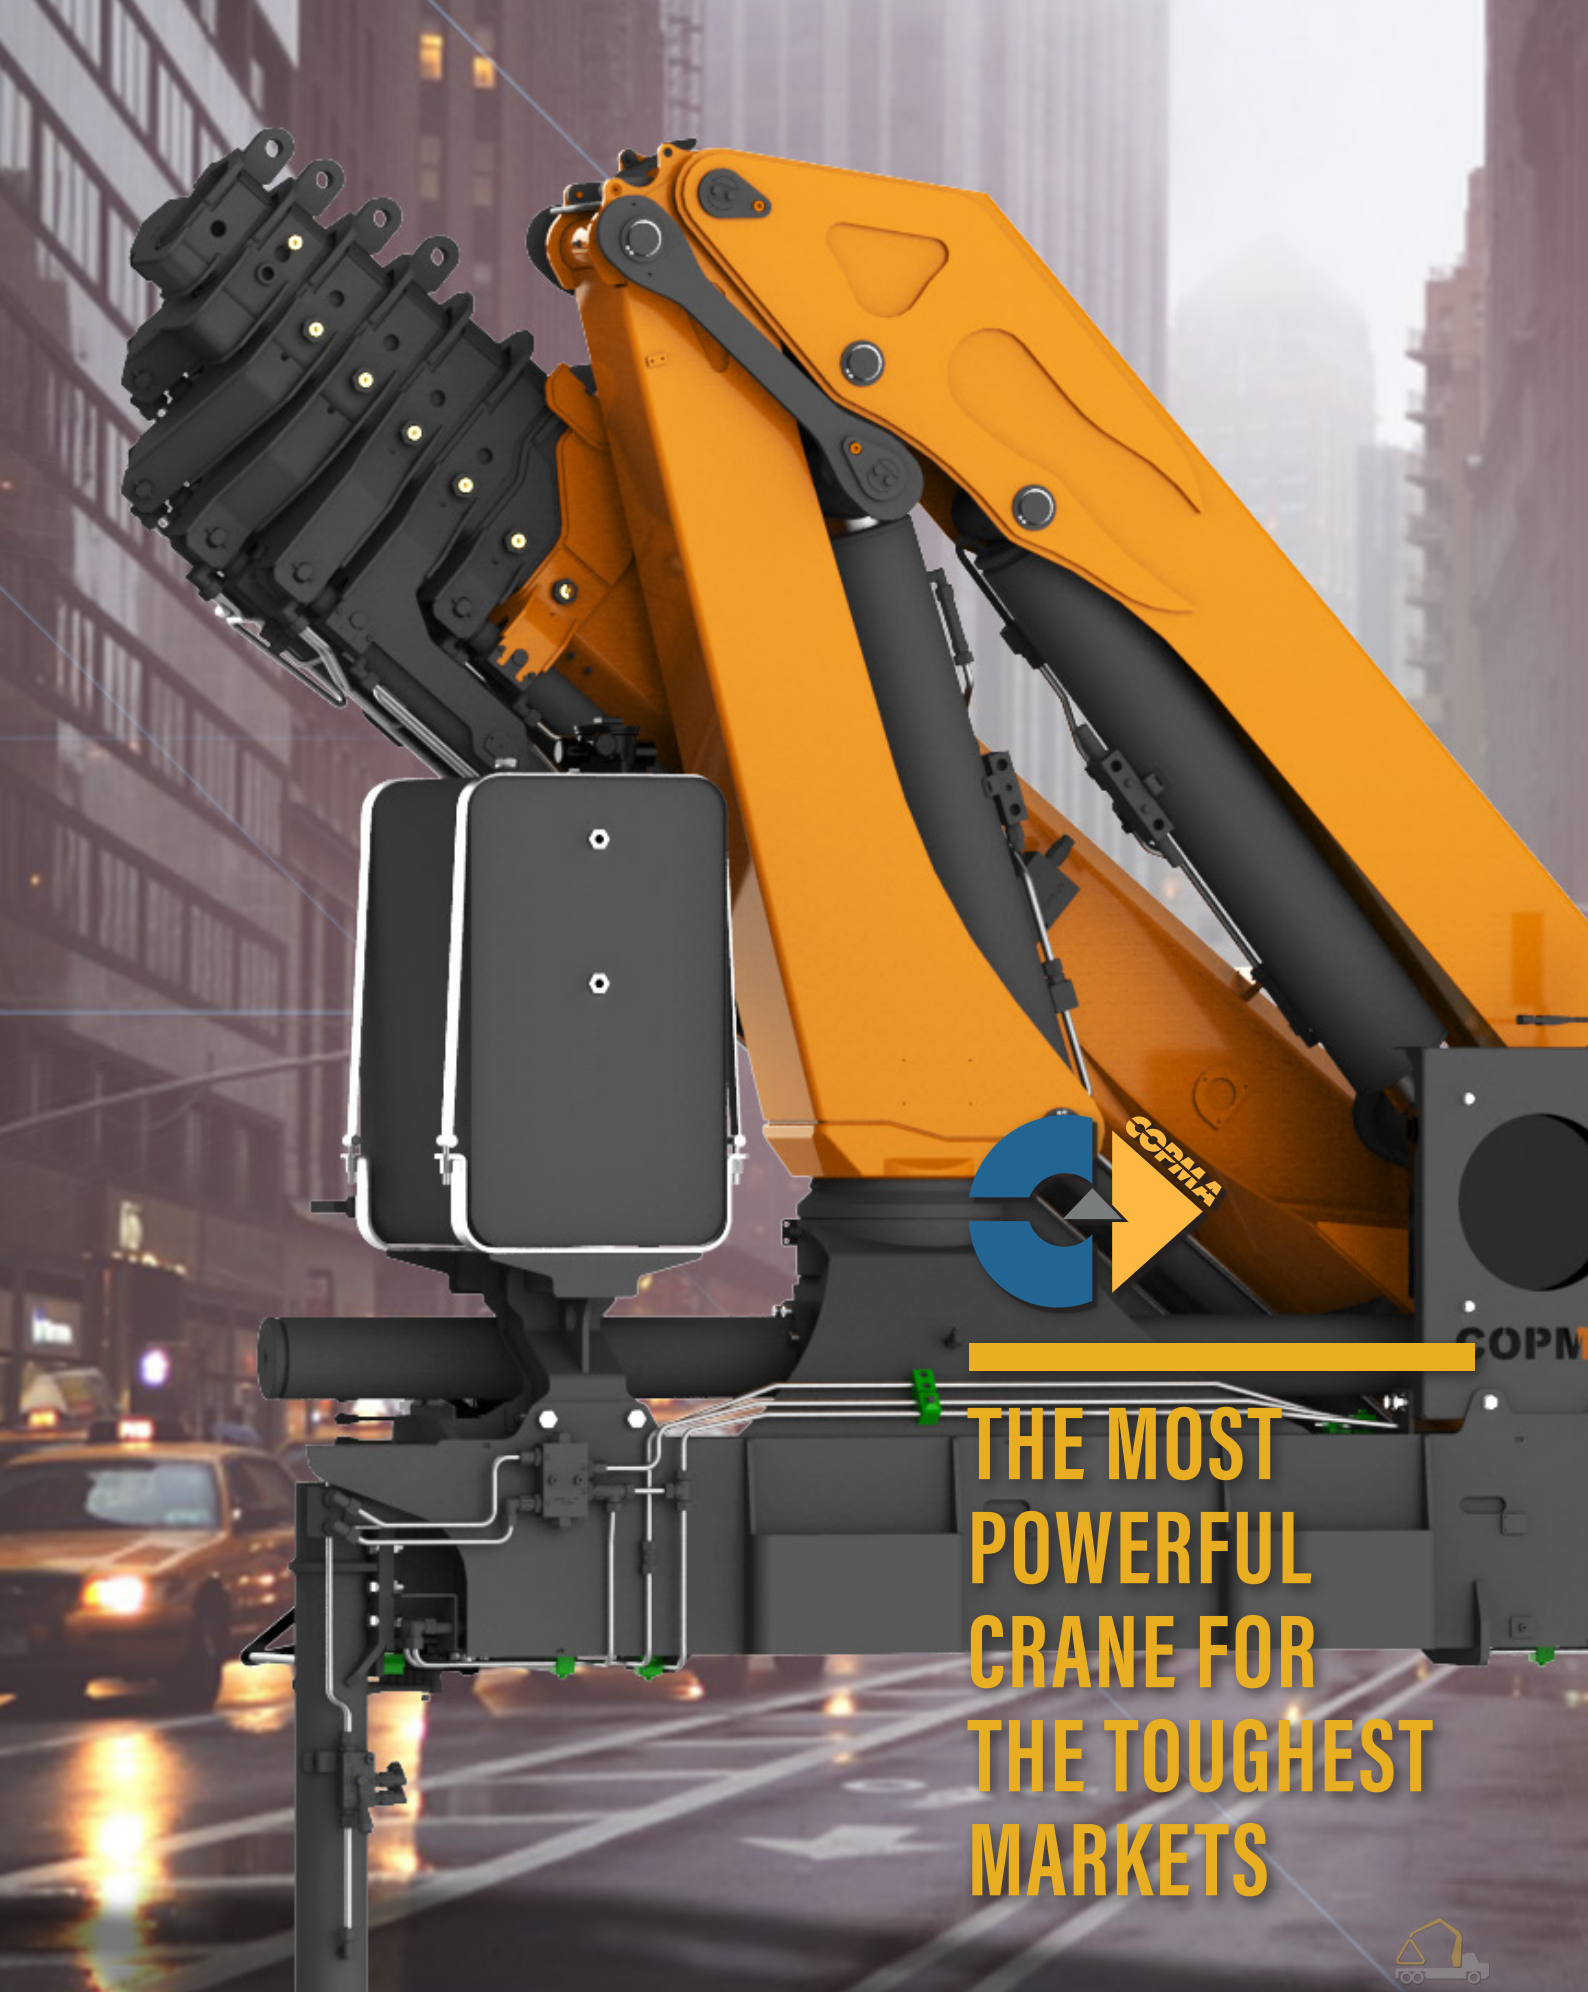

**THE MOST  
POWERFUL  
CRANE FOR  
THE TOUGHEST  
MARKETS**

# COPMA 168

More Safety & Security

**DESIGNED WITH THE HIGHEST  
HYDRAULIC SYSTEMS AND THE  
TOUGHEST STRUCTURAL STEEL  
TO PERFORM THE MAXIMUM  
LIFTING CAPACITY.**

- **Performing and reliable electronic devices**
- **Column with high mechanical characteristics**
- **High Degree of User Friendliness**
- **Ready to work in a few movements**
- **Excellent weight/performance ratio**





**DESIGNED  
FOR FLEXIBLE  
SERVICES**



# COPMA 168

## Technical Features

**CUTTING EDGE FEATURES  
FOR MAXIMUM LIFTING  
POWER, STABILITY AND  
OPERATIONAL SAFETY IN EVERY  
WORKING CONDITION.**

### Standard features

- easy use



- control



- structure



### optional features

- easy use



- control



\*E.C. market specific equipment



**HSE**  
easy use  
**High Speed Extension**

Hydraulic system for reducing load losses and bottlenecks for the correct output sequence of the extensions by increasing the speed of 30%-60% thanks to the regenerative valve. Greater continuous performance thanks to lower fluid temperature.




**TAD**  
control  
**Transport Alert Device**

Sensors on the basement controls the correct closing of the beams and a column switch sensor indicates if the crane is in a folded position, no more than 4 mt in height. The operator is warned with light and sound signals in the truck cabin.




**TES**  
3.0  
control  
**Truck Electronic Stability 3.0**

Active stability control for performance optimization according to the type of stabilization (3) to guarantee maximum safety in all working conditions. Mandatory in the CE market, it helps a better vehicle-crane configuration.

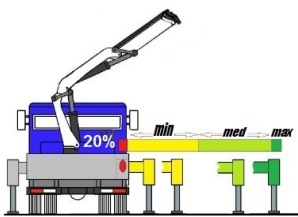


**CCLS**  
structure  
**Constant Control Link**

The cranes equipped with connecting rods on the articulations, with a constant lifting moment over the entire working arc, allow to 100% optimize the crane's capacity in positions close to the maximum vertical.

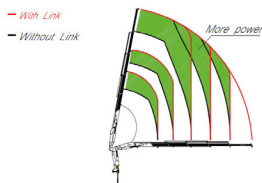

**WLC**  
control  
**Winch Linear Control**

The winch linear electronic control allows pulling the rope according to the working angle of the crane and the JIB. It optimizes the load control and makes every movement easier and safer.



**CMS**  
2.0  
control  
**Crane Monitoring System 2.0**

Crane stability control system TES2-TES3 with safety and overload controls and HPVE lifting speed management. Active control on 4-8 working areas according to the model and vehicle stability requirements.




**NCS**  
control  
**Negative Control System**

Slope sensors mounted on the articulated booms of the crane, combined with the electronic control, control the maximum vertical angle of the arms and the JIB preventing incorrect or dangerous movements by the operator.



**NBS**  
structure  
**Negative Boom System**

The linkage on the articulation of the secondary boom permits the introduction of loads within restricted spaces. It enables the recovery of the deflection of the extension boom group due to the weight and the load raised on the extensions.

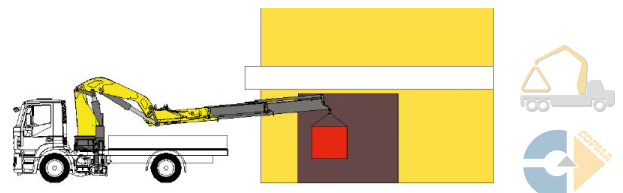




### Rotation Rack Pinion

The rotation system with rack and pinion is the best optimal solution for the most performative lifting capacity, it reduce the weights and crane dimension for the most compact configuration.




### Hydraulic Lifting Stabilizers 2.0

The cylinder of the stabilizer is lifted with an auxiliary jack, allowing the vertical movement within the bushes or rotating around a pin. It saves operative time in increasing the security of the setup.




### Manual Lifting Stabilizers 2.0

Manual raising of the stabilizers facilitated by a compressed gas cylinder which assists the operator during the rotation of the jack. This system assists the operator with less effort in adjusting the legs.

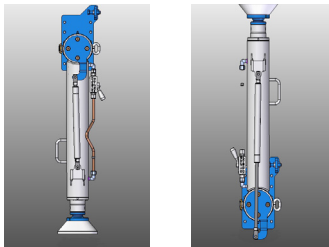

### Electronic Radio Display

A display on the remote control allows the operator to maintain the total control of all the crane functions in real time by managing the work mode, the stability control, and oversee any maintenance and diagnostic messages.

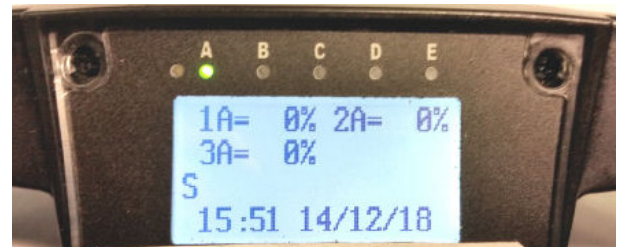

### Radio Remote Control 3.0

Radio control with directly flanged actuation electronics with proportional distribution. The remote control allows operating the crane while constantly monitoring the areas of operation.







# 168 HIGH POWER

## Load Charts


### 2 extensions

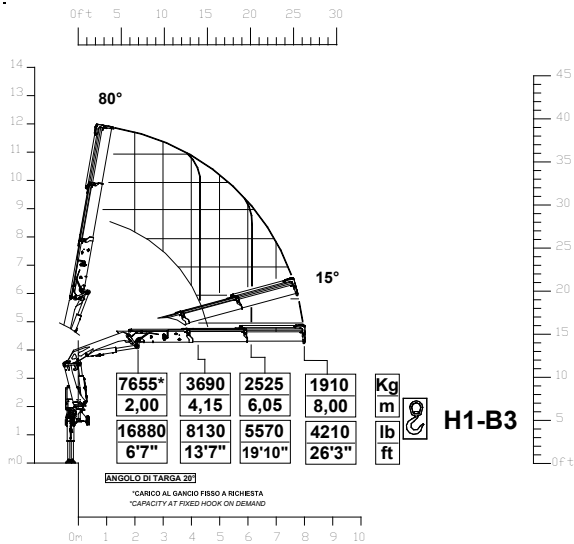


### 3 extensions

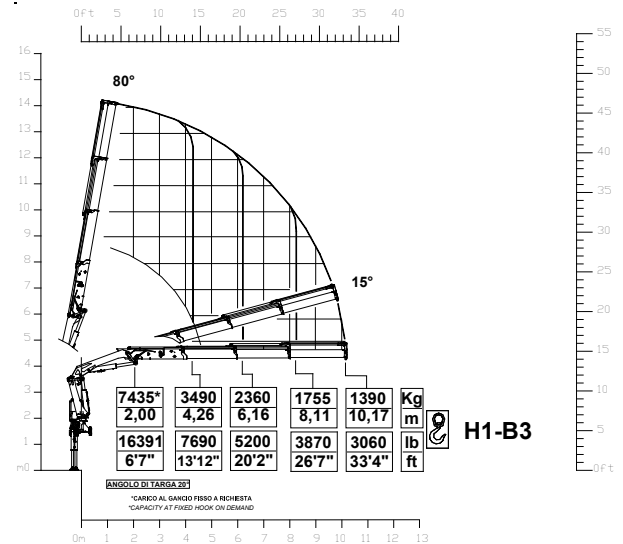


### 4 extensions

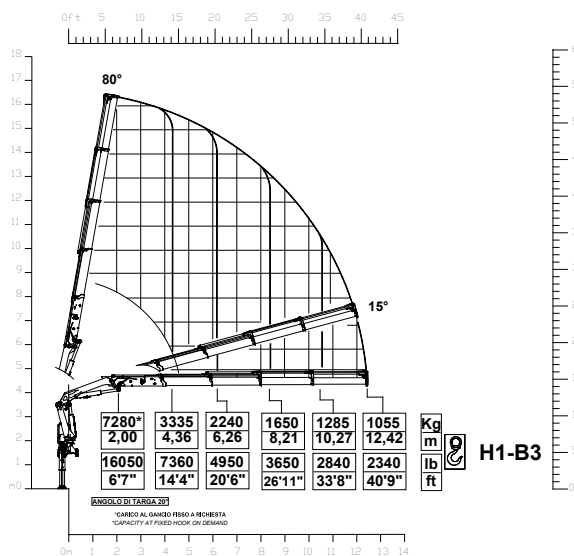


### 5 extensions

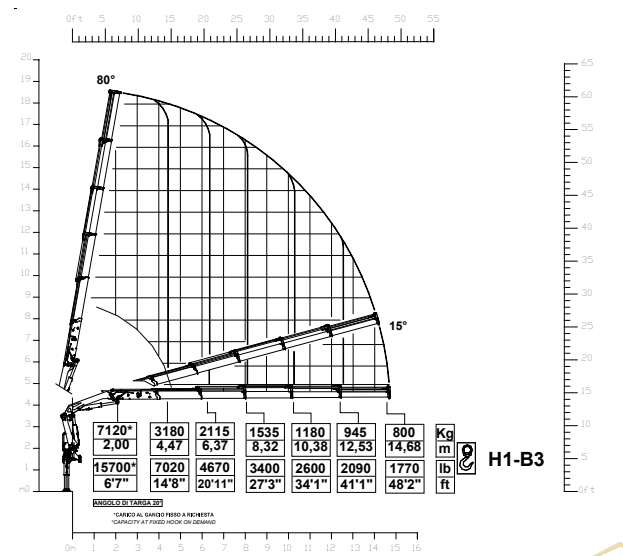


### 6 extensions

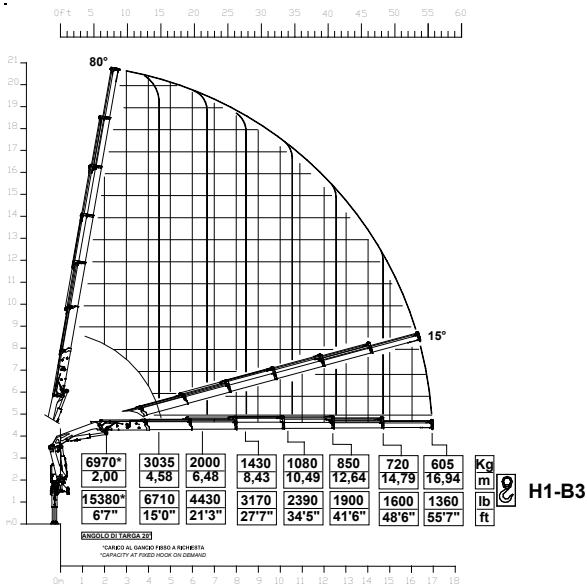


### 7 extensions

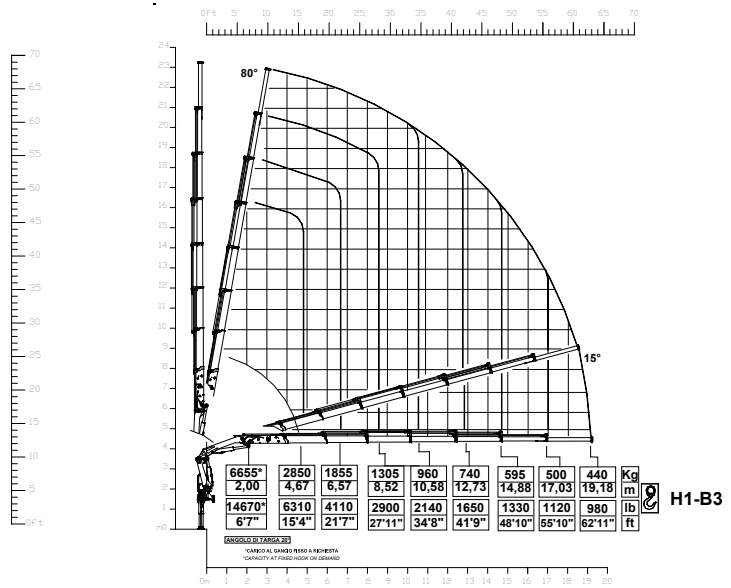

### 168.4 + J2

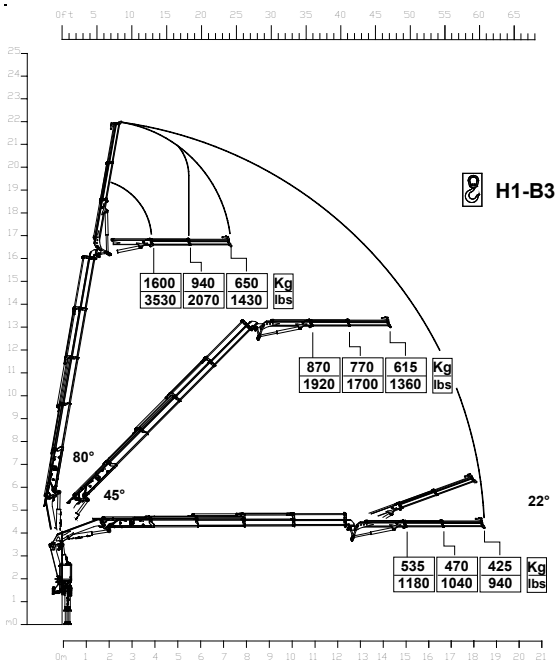

### 168.4 + J3

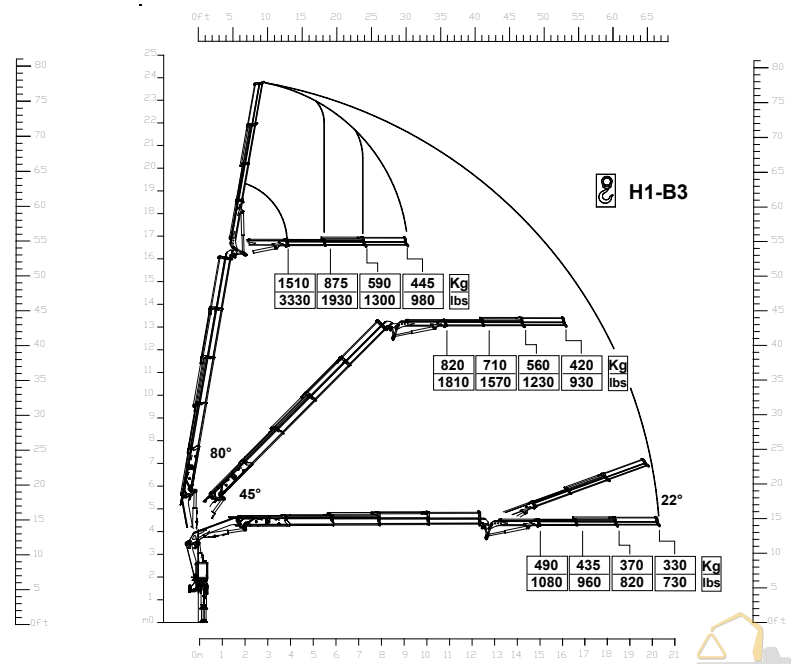





# SUPERIOR RELIABILITY FOR EVERY OPERATOR



168.4 + J4



168.5 + J2

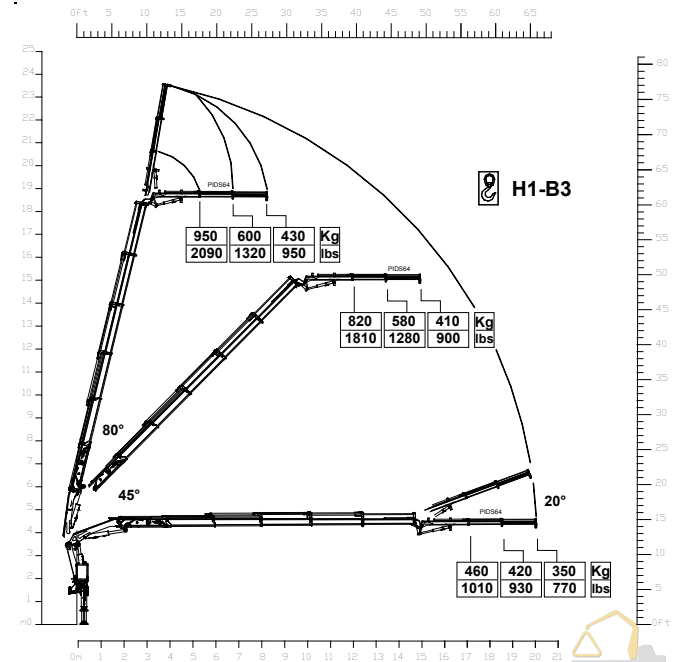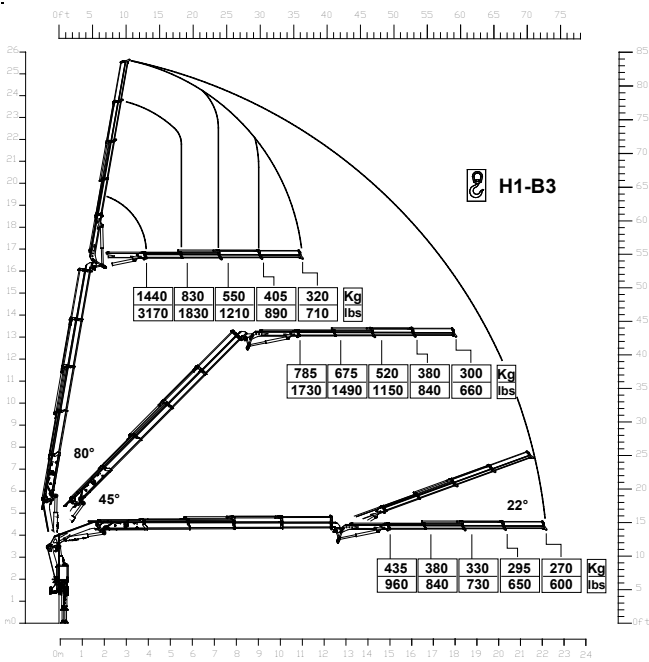



# 168 HIGH POWER

## Crane Dimensions


### back cabin left

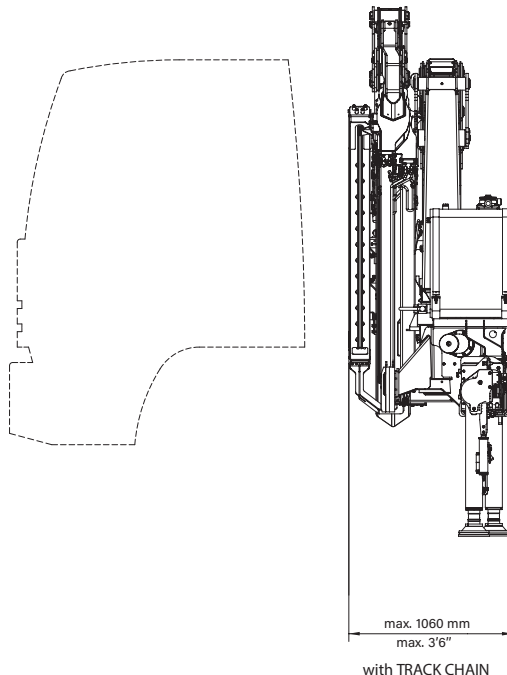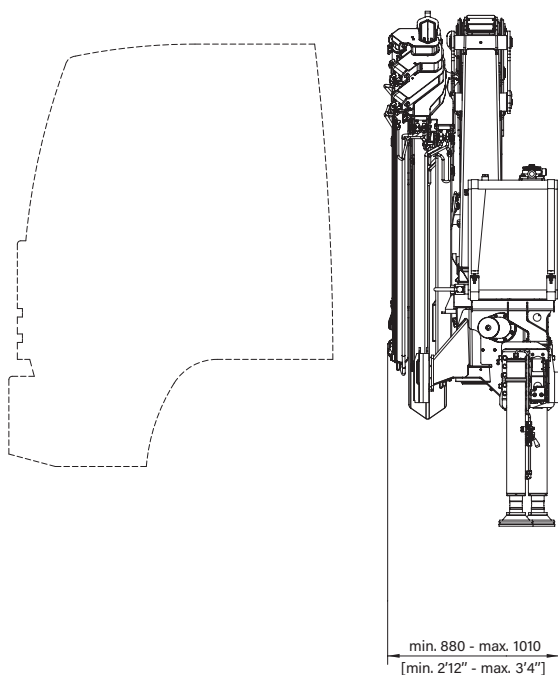


### rear truck

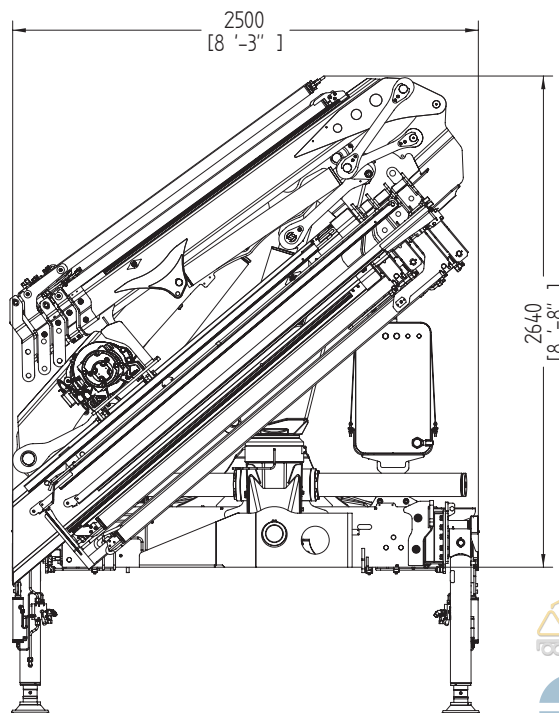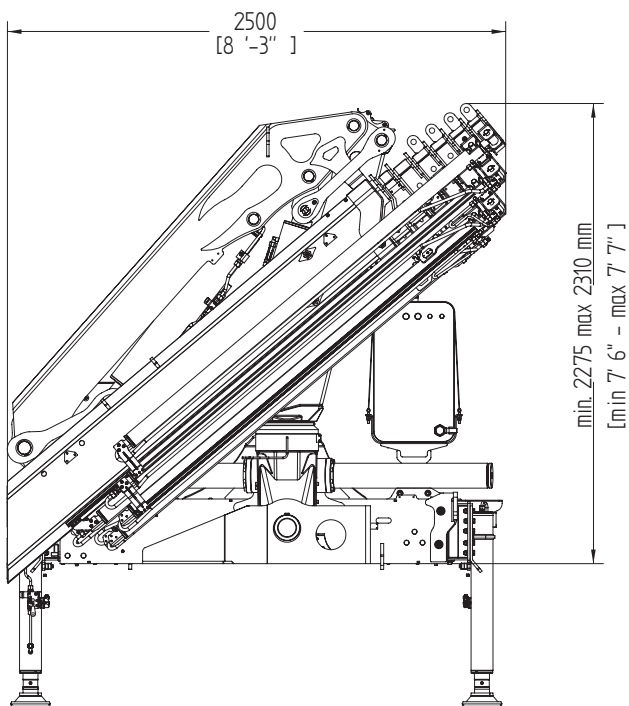


### top cabin

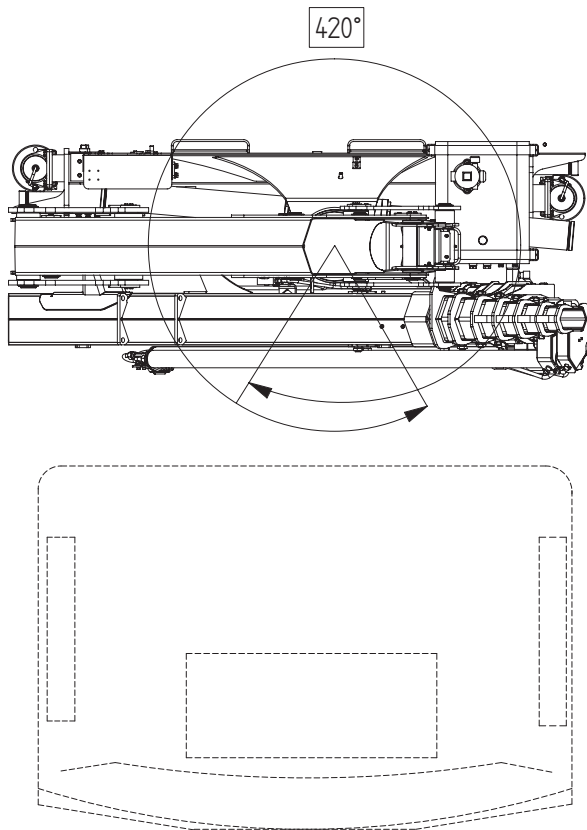

### operational

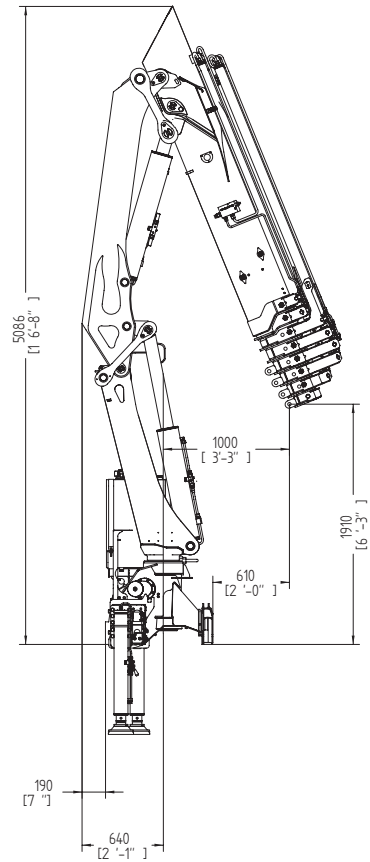

### extended outriggers

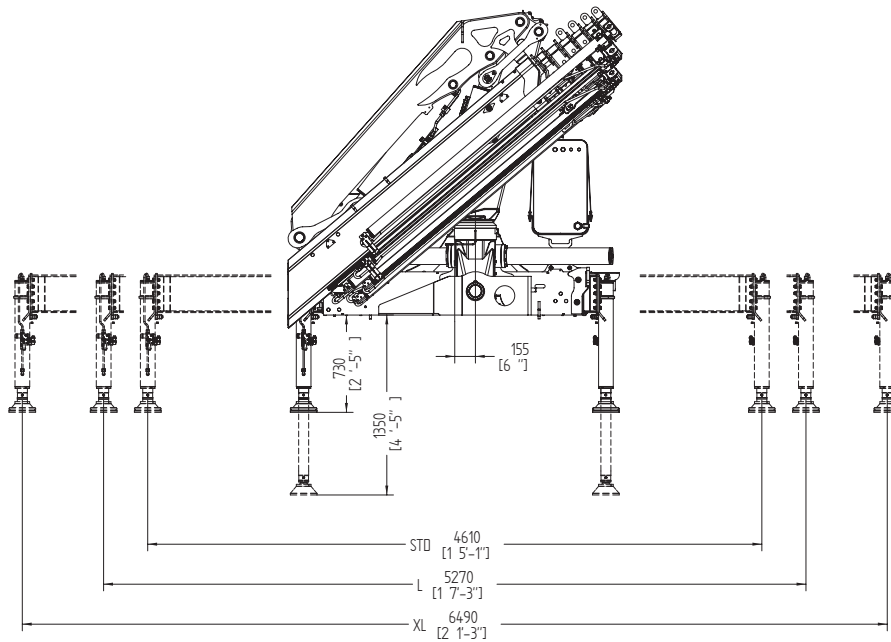










\* Note:  
 Technical features are not binding.  
 The company reserves itself the right to any modification without notice












# 168 HIGH POWER

## Technical Data

### summarized data

									
	kN.m	bar	l/min	kg	°	mm	mm	mm	mm
168.2	150	300	40	1935	420	2500	880	2275	4600/5270/6500
168.3	146	300	40	2055	420	2500	880	2275	4600/5270/6500
168.4	143	300	40	2170	420	2500	915	2275	4600/5270/6500
168.4J2	143	300	40	2525	420	2500	1060	2640	4600/5270/6500
168.4j3	143	300	40	2590	420	2500	1060	2640	4600/5270/6500
168.4j4	143	300	40	2630	420	2500	1060	2640	4600/5270/6500
168.5	139,4	300	40	2280	420	2500	980	2275	4600/5270/6500
168.5J2	139,4	300	40	2530	420	2500	1060	2550	4600/5270/6500
168.6	136.4	300	40	2380	420	2500	1010	2275	4600/5270/6500
168.7	130.6	300	40	2470	420	2500	1010	2310	4600/5270/6500

									
	lbs.ft	psi	gal/min	lbs	°	ft/inc	ft/inc	ft/inc	ft/inc
168.2	110596	4351	10,57	3968	420	8'2"	2'12"	7'6"	15'1"-17'3"-21'3"
168.3	107426	4351	10,57	4530	420	8'2"	2'12"	7'6"	15'1"-17'3"-21'3"
168.4	105214	4351	10,57	4784	420	8'2"	3'	7'6"	15'1"-17'3"-21'3"
168.4J2	105214	4351	10,57	5570	420	8'2"	3'6"	8'8"	15'1"-17'3"-21'3"
168.4j3	105214	4351	10,57	5710	420	8'2"	3'6"	8'8"	15'1"-17'3"-21'3"
168.4j4	105214	4351	10,57	5800	420	8'2"	3'6"	8'8"	15'1"-17'3"-21'3"
168.5	102816	4351	10,57	5300	420	8'2"	3'3"	7'6"	15'1"-17'3"-21'3"
168.5J2	102816	4351	10,57	5580	420	8'2"	3'6"	8'4"	15'1"-17'3"-21'3"
168.6	100569	4351	10,57	5247	420	8'2"	3'5"	7'6"	15'1"-17'3"-21'3"
168.7	96292	4351	10,57	5445	420	8'2"	3'5"	7'7"	15'1"-17'3"-21'3"

### technical data

Max. lifting moment	150 kNm	110596 ft.lbs
Max. hydraulic outreach	19.32 m	63'39"
Slewing angle	420°	420°
Slewing torque	2200 daNm	16220.8 ft.lbs
Stabilizer spread	4.60/5.27/6.5 mt	15'1"/ 17'3" 21'3"
Fitting space required (min./max)	0.88 m/1.01 m	2'12"/3'4"
Width folded	2,50 m	8'2"
Max. operating pressure	300 bar	4641 psi
Recommended pump capacity	40 l/min	10.57 US gal./min
Dead weight (vers .2)	1935 kg	4266 lbs

\* Note:  
 Technical features are not binding.  
 The company reserves itself the right to any modification without notice





GET READY TO A  
BETTER LIFTING  
EXPERIENCE

# COPMA 168



knuckle  
boom  
cranes



Powerful Synergies



**CPS**



**CPS  
STEEL**

## CPS GROUP S.P.A.

281 Via Emilia , Castel Bolognese (RA) , 48014  
Italy

T +39 0546 653 711

[sales.cpsgroup@cps-group.com](mailto:sales.cpsgroup@cps-group.com)

[service.cpsgroup@cps-group.com](mailto:service.cpsgroup@cps-group.com)

[cps-group.com](http://cps-group.com)

UNICERT  
ISO 9001:2008



COPMA MODEL 168 HIGH POWER 3-2019 all rights reserved CPS GROUP S.P.A.